


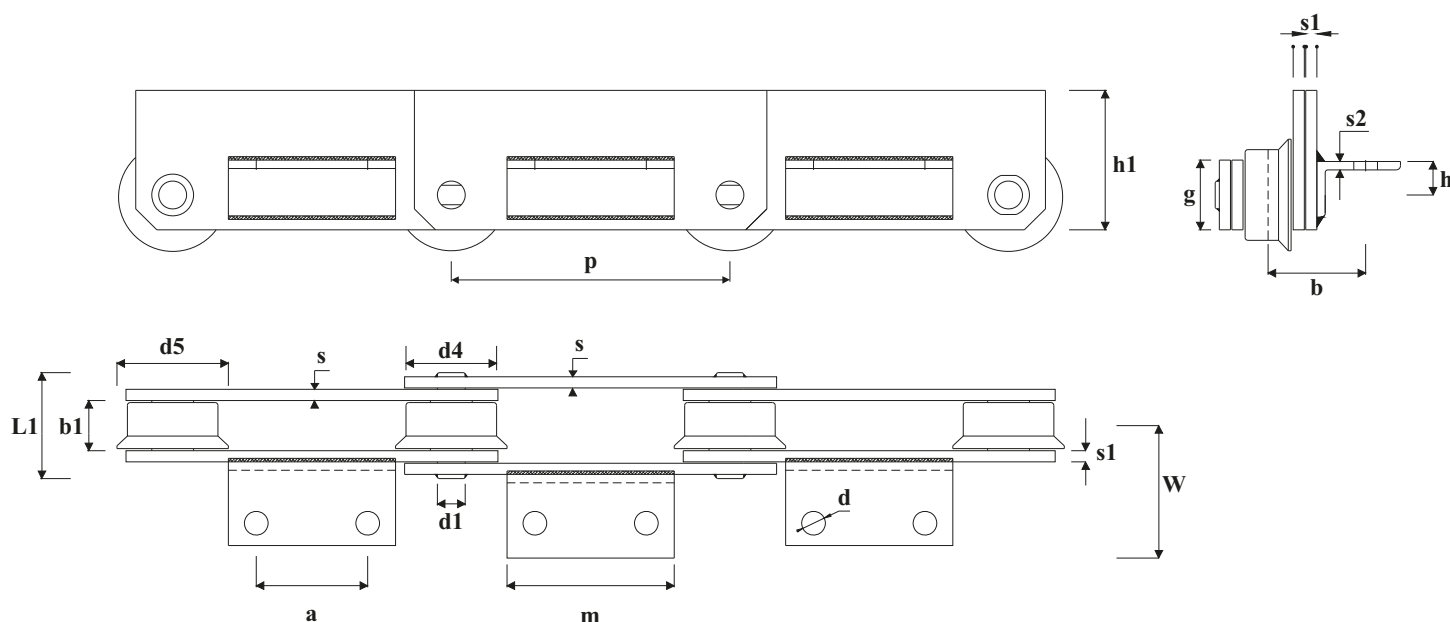

CHAIN No	Pitch	Width Between Inn. Plates	Roller Ø		Pin Length	Pin Ø	Height Of Special Plate	Plate Thickness	Thickness Of Special Plate	Thickness Of Angular	Plate Depth	ATTACHMENT						Ultimate Tensile Strength
	p	b1	d4	d5	L1	d1	h1	s	s1	s2	g	h	m	a	d	b	W	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
W1002240	100	22	40	50	54	15	90	6	6	6	35	28	☆	☆	☆	☆	☆	9.800
W1252850*	125	28	50	60	54	12	100	5	5	5	35	-7	☆	☆	☆	☆	☆	8.000
W1252850/1	125	28	50	60	54	12	100	5	5	5	35	35	☆	☆	☆	☆	☆	8.000
W1252850/2	125	28	50	65	55	12	100	5	6	6	35	35	☆	☆	☆	☆	☆	8.000
W1252850/3	125	28	50	65	60	12	100	5	8	8	35	35	☆	☆	☆	☆	☆	8.000
W1253450*	125	34	50	60	61	12	100	5	5	5	35	-5	☆	☆	☆	☆	☆	8.000
W1253450/1	125	34	50	60	61	12	100	5	5	5	35	35	☆	☆	☆	☆	☆	8.000
W1603770	160	37	70	90	75	18	100	7	8	8	50	55	☆	☆	☆	☆	☆	16.000
W1604385	160	43	85	100	83	21	120	8	8	8	60	-11	80	50	14	70	109	22.400
W2003765	200	37	65	80	76	20	100	8	8	8	50	55	120	80	17	70	95	16.000
W2003770*	200	37	70	90	75	18	120	7	8	8	50	-5	☆	☆	☆	☆	☆	16.000
W2003770/1	200	37	70	90	75	18	120	7	8	8	50	55	☆	☆	☆	☆	☆	16.000

☆ A richiesta. / ☆ According to request.

* La posizione del profilo dell'angolare è al di sotto dell'interasse catena. / * The position of the angles profile is under the centerline of the chain.