


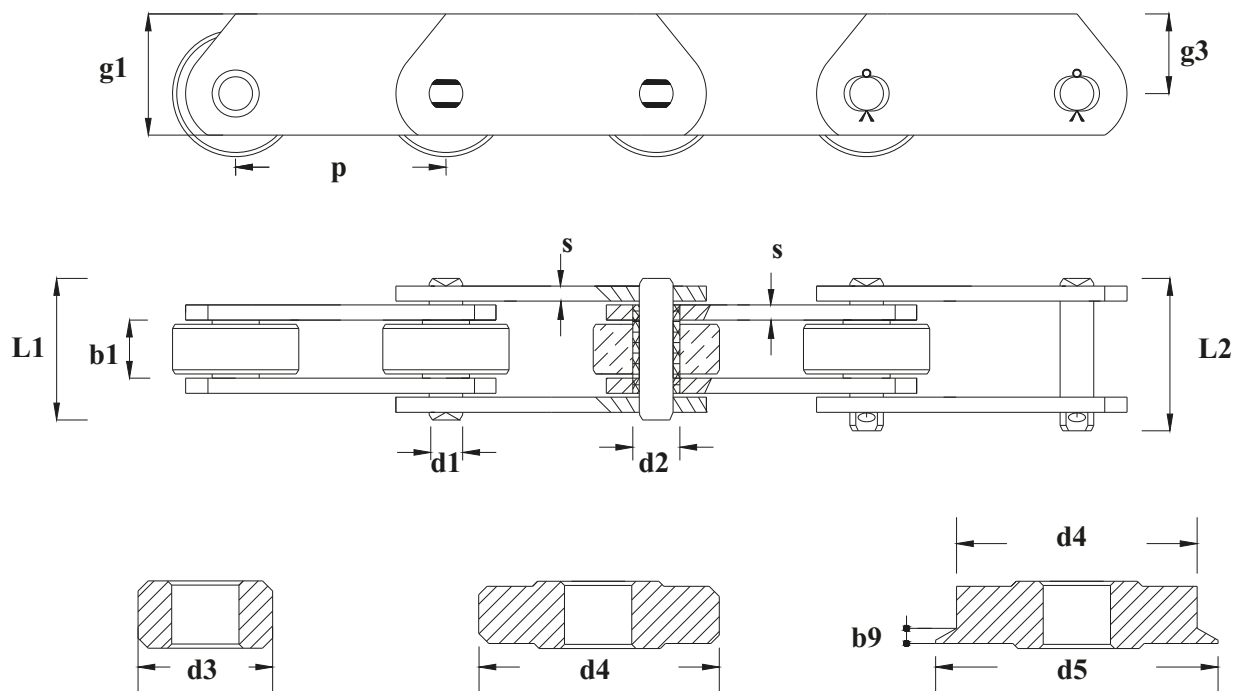

CHAIN No	PITCH								Width Between Inner Plates
	P								b1
	mm								mm
MD20	40	50	63	80	100	125	160		16
MD28	50	63	80	100	125	160	200		18
MD40	63	80	100	125	160	200	250		20
MD56	63	80	100	125	160	200	250		24
MD80	80	100	125	160	200	250	315		28
MD112	80	100	125	160	180	200	250		32
MD160	100	125	160	200	250	315			37
MD224	125	160	200	250	315				43
MD315	160	200	250	315					48
MD450	200	250	315						56

CHAIN No	Roller Ø		Flanged Roller Ø		Pin Length		Pin Ø	Bush Ø	Plate Depth	Plate Thickness	Ultimate Tensile Strength	
	d3	d4	d4/d5	b9	L1	L2	d1	d2	g	s	Q	**Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
MD20	12,5	25	25/30	4,0	33	36	6,0	9,0	20	3,0	2.000	3.200
MD28	15,0	30	30/36	4,0	36	40	7,0	10,0	20	3,0	2.800	4.200
MD40	18,0	36	36/42	4,5	42	45	8,5	12,5	25	4,0	4.000	6.000
MD56	21,0	42	42/50	5,0	48	53	10,0	15,0	30	4,0	5.600	8.500
MD80	25,0	50	50/60	6,0	55	58	12,0	18,0	35	5,0	8.000	12.000
MD112	30,0	60	60/70	7,0	64	68	15,0	21,0	40	6,0	11.200	17.000
MD160	36,0	70	70/85	8,5	75	79	18,2	25,0	50	7,0	16.000	25.000
MD224	42,0	85	85/100	10,5	84	90	21,0	30,0	60	8,0	22.400	32.000
MD315	50,0	100	100/120	12,0	100	105	25,0	36,0	70	10,0	31.500	51.000
MD450	60,0	120	120/140	12,0	116	124	30,0	42,0	80	12,0	45.000	68.000

** Q Carico di rottura maggiorato con piastre trattate.

** Q Higher breaking load with hardened plates.