




TYPE 1

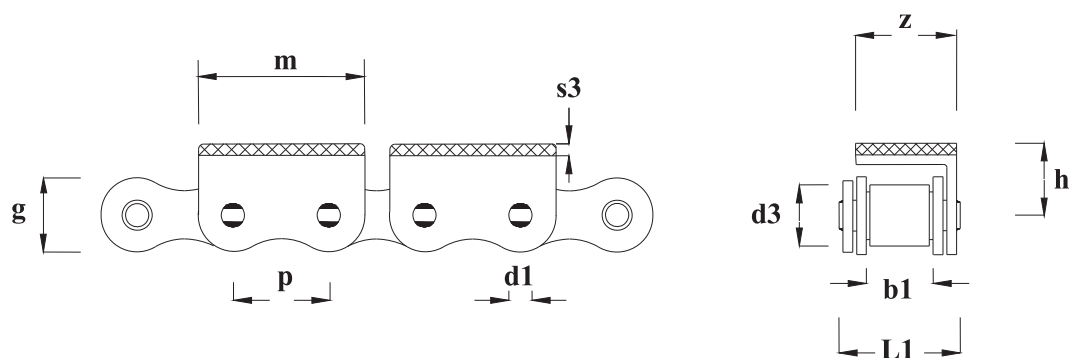

TYPE 2

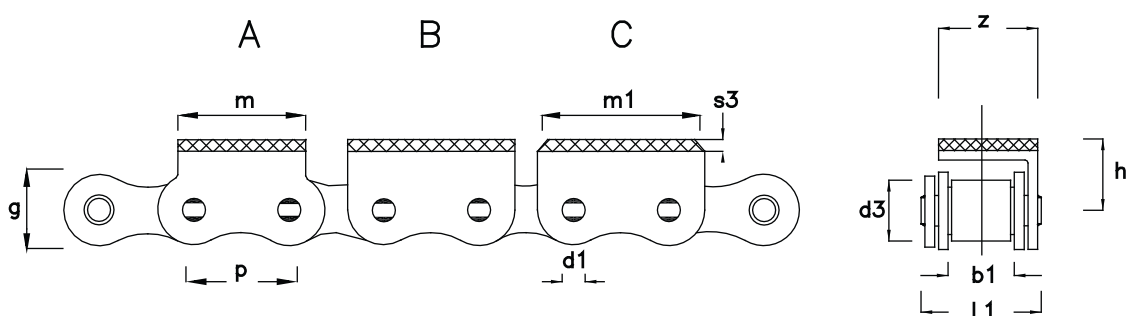

TYPE 3

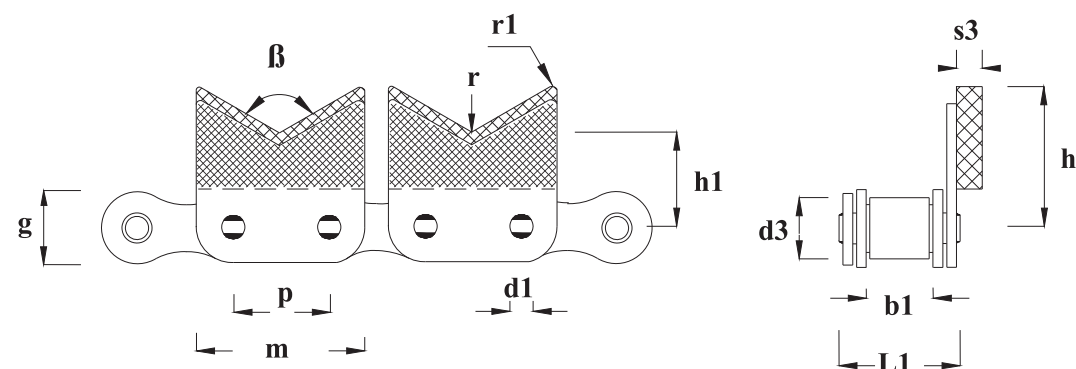

OUR CODE	Type	Pitch	Roller Ø	Width Between Inn. Plates	Pin Ø	Pin Length	Plate Depth	ATTACHMENT						Ultimate Tensile Strength	Weight Per Meter
		p	d3	b1	d1	L1	g	h	h1	m	m1	s3	z	Q	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/mt
C06B1AGG	1	9,525	6,35	5,72	3,28	13,30	8,20	9,00		18,00		2,50	8,70	900	0,45
C08B1AGG	1	12,70	8,51	7,75	4,45	16,70	11,80	12,80		24,00		3,00	12,70	1.800	0,90
C10B1AGG *	2/A	15,875	10,16	9,65	5,06	20,00	14,40	12,30		20,80		3,40	13,00	2.240	0,95
C10B1AGG *	2/B	15,875	10,16	9,65	5,06	20,00	14,40	14,00		28,80		3,40	13,00	2.240	1,09
C10B1AGG *	2/C	15,875	10,16	9,65	5,06	20,00	14,40	12,30		28,80	26,00	3,40	13,00	2.240	1,09
C081AMGG	3	12,70	7,75	3,30	3,66	9,20	9,90	16,00	6,50	24,35		1 / 2,5 *		800	0,50
C083AMGG	3	12,70	7,75	4,88	3,94	12,90	10,3	16,00	6,50	24,35		1 / 2,5 *		1.200	0,70
C08B1AMGG	3	12,70	8,51	7,75	4,45	16,70	11,80	16,00	6,50	24,35		1 / 2,5 *		1.800	0,90

* Esecuzione anche su catena speciale 10BS (vedi pag. n.4 "Trasmissione").

* Available also on 10BS special roller chain (ref. pag. n.4 "Transmission").